

 NEMO

GLAZED CERAMIC MOSAICS






# GLAZED MOSAICS





# GLAZED MOSAICS

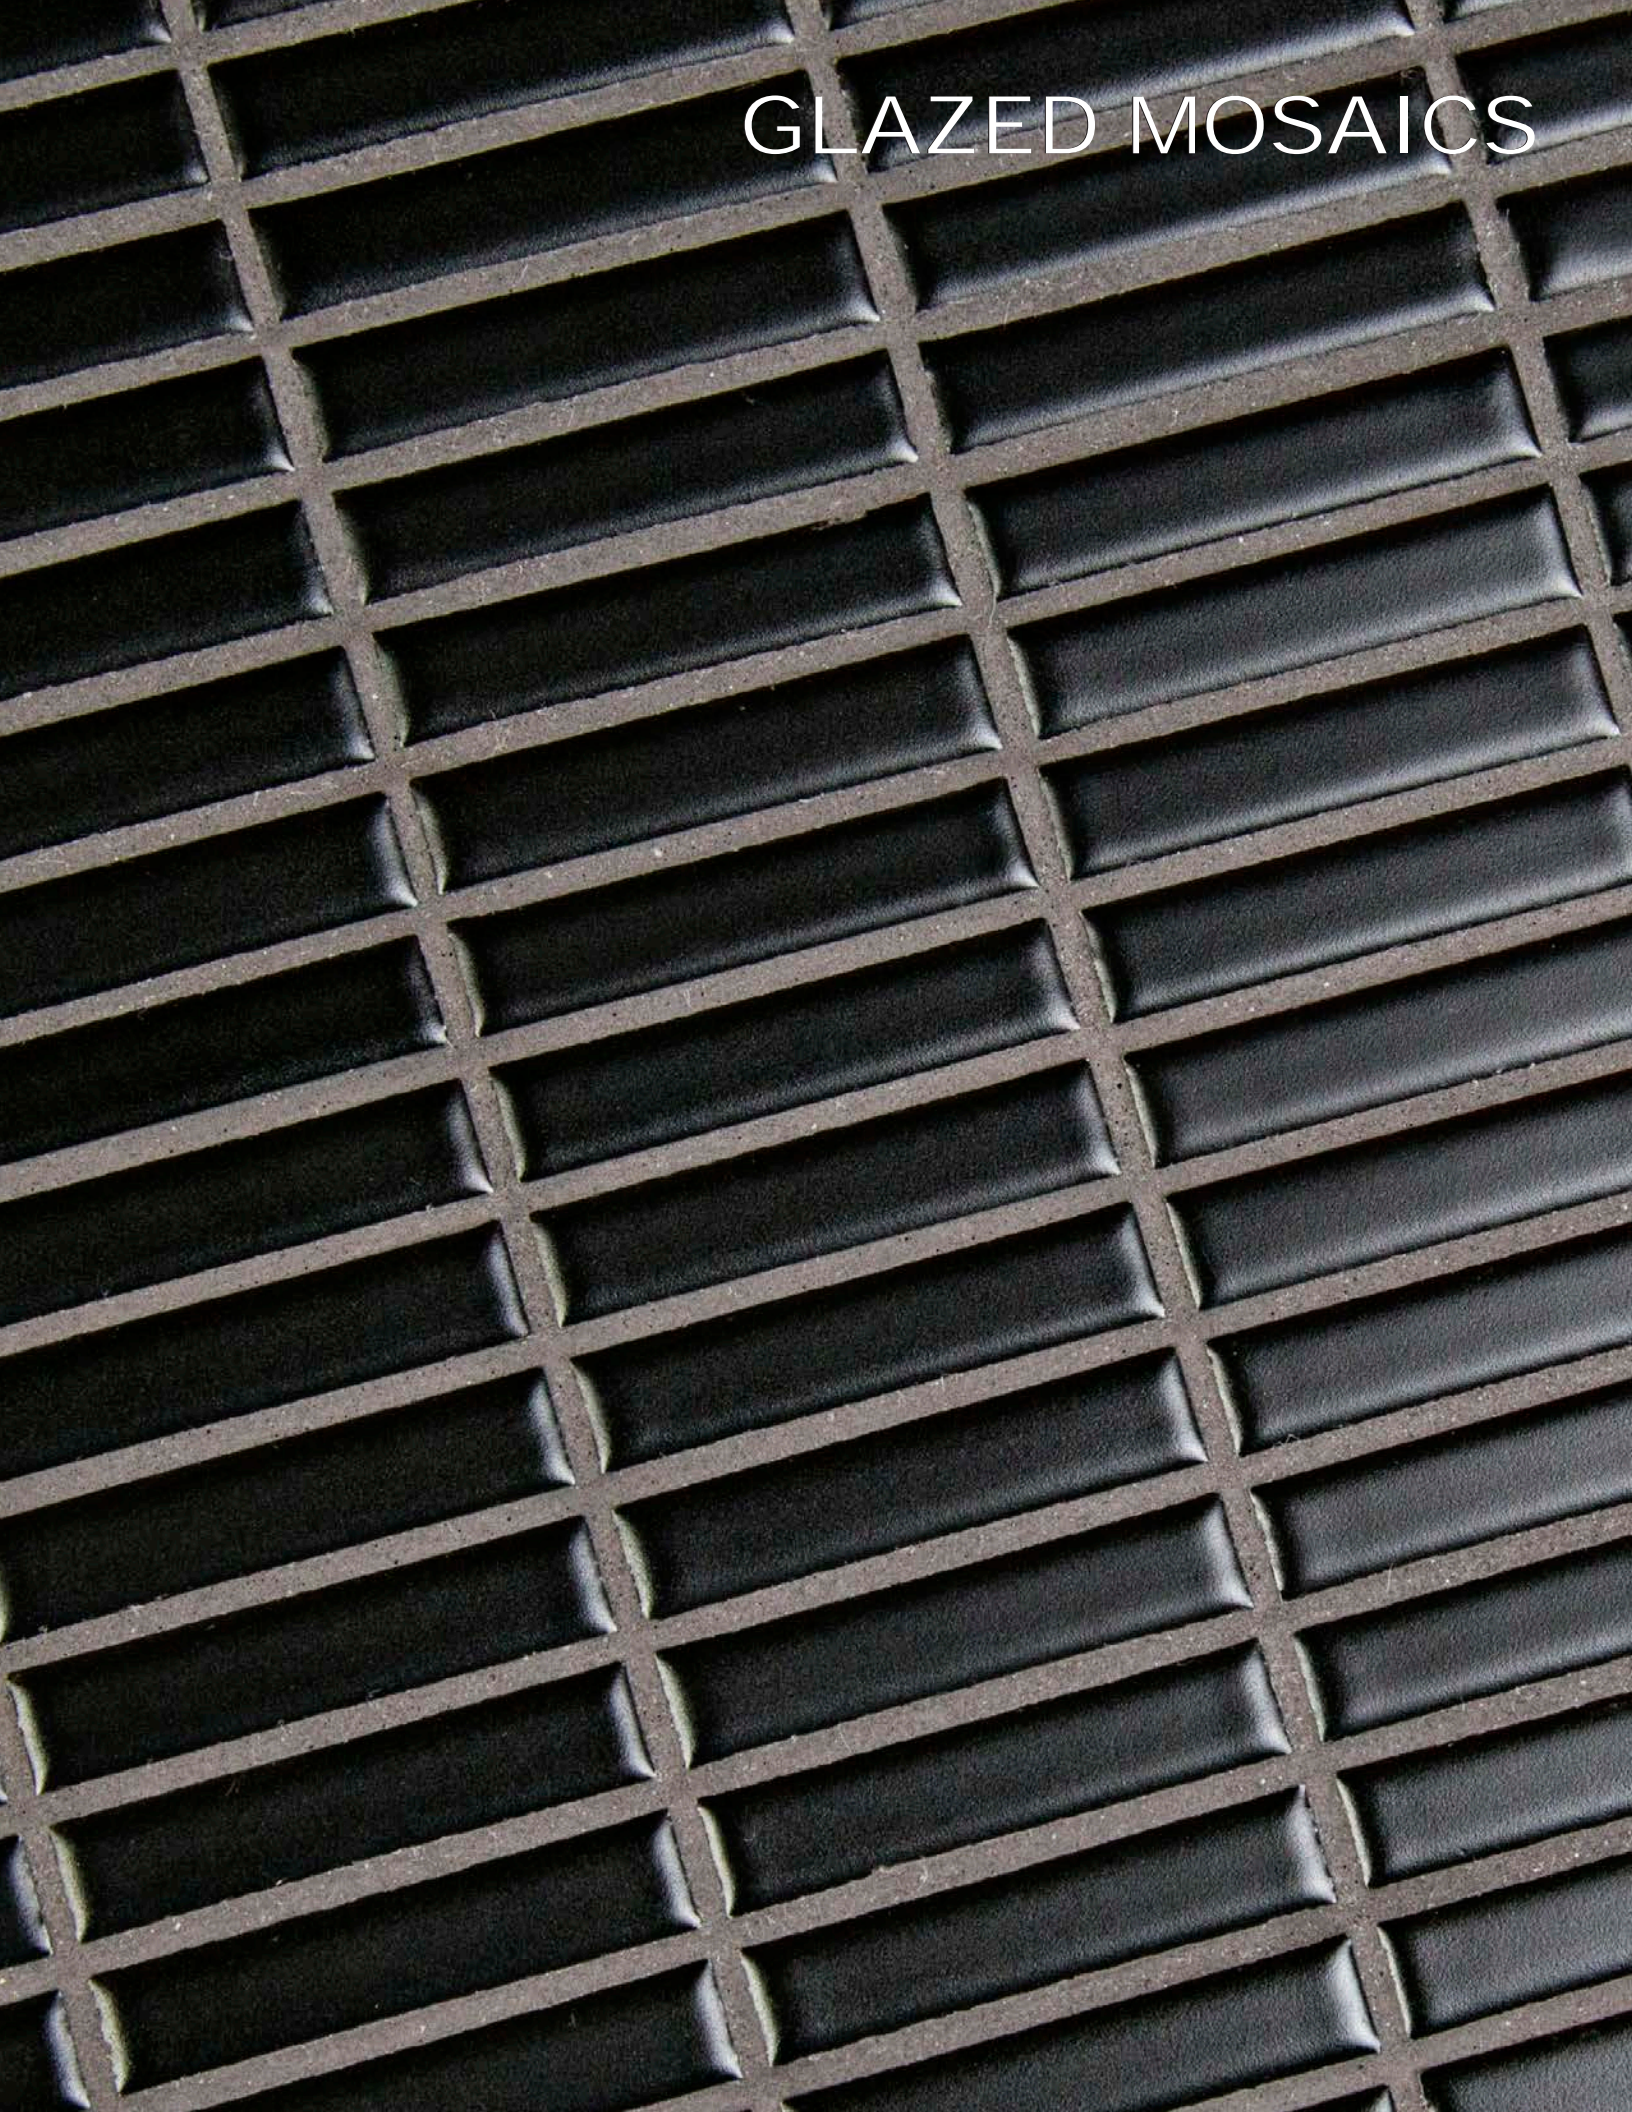



# GLAZED HERRINGBONE COLORS



WHITE



DANDELION




VANILLA



JADITE



CUMULUS



CORNFLOWER



LATTE



SAND



MINK



COCOA



COBALT



TWILIGHT



CANARY



ORANGE




RED



SMOKE



FOG



BLACK



DOVE



GREY MIX

# GLAZED STACK



WHITE



DANDELION



FRENCH  
VANILLA



LATTE



JADITE



RED



DOVE



CUMULUS



CORNFLOWER



TWILIGHT



BLACK




# GLAZED PENNYROUNDS




WHITE




DANDELION



VANILLA




JADITE




CUMULUS




CORNFLOWER




LATTE




SAND




MINK



COCOA



COBALT




TWILIGHT




CANARY



ORANGE




RED



SMOKE




FOG




BLACK



DOVE




GREY MIX




HERRINGBONE

3/8"x2 on 12 x 12" Sheet  
Wall & Floor Application



STACK

3/8 x 2" on 12 x 12" Sheet  
Wall Application



PENNYROUNDS

3/4" on 12 x 12" Sheet  
Wall & Floor Application

\*White & Black in all patterns available in gloss and matte finishes


# GLAZED 1" HEXAGON COLORS




WHITE\*




VANILLA




LATTE




CORNFLOWER




SAND



MINK



COCOA




COBALT




CANARY




ORANGE




RED




BLACK\*



DOVE



FOG




GREY MIX

\*Available in matte or gloss finishes

\*\*Additional colors available: twilight, jadite, smoke, cumulus and dandelion.


Please contact sales representative for more information

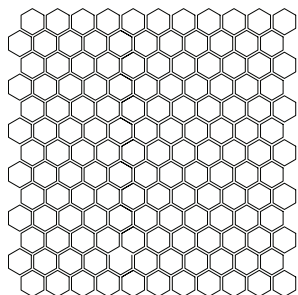

1" on 12 x 12" Sheet  
Wall & Floor Application




# GLAZED MOSAICS

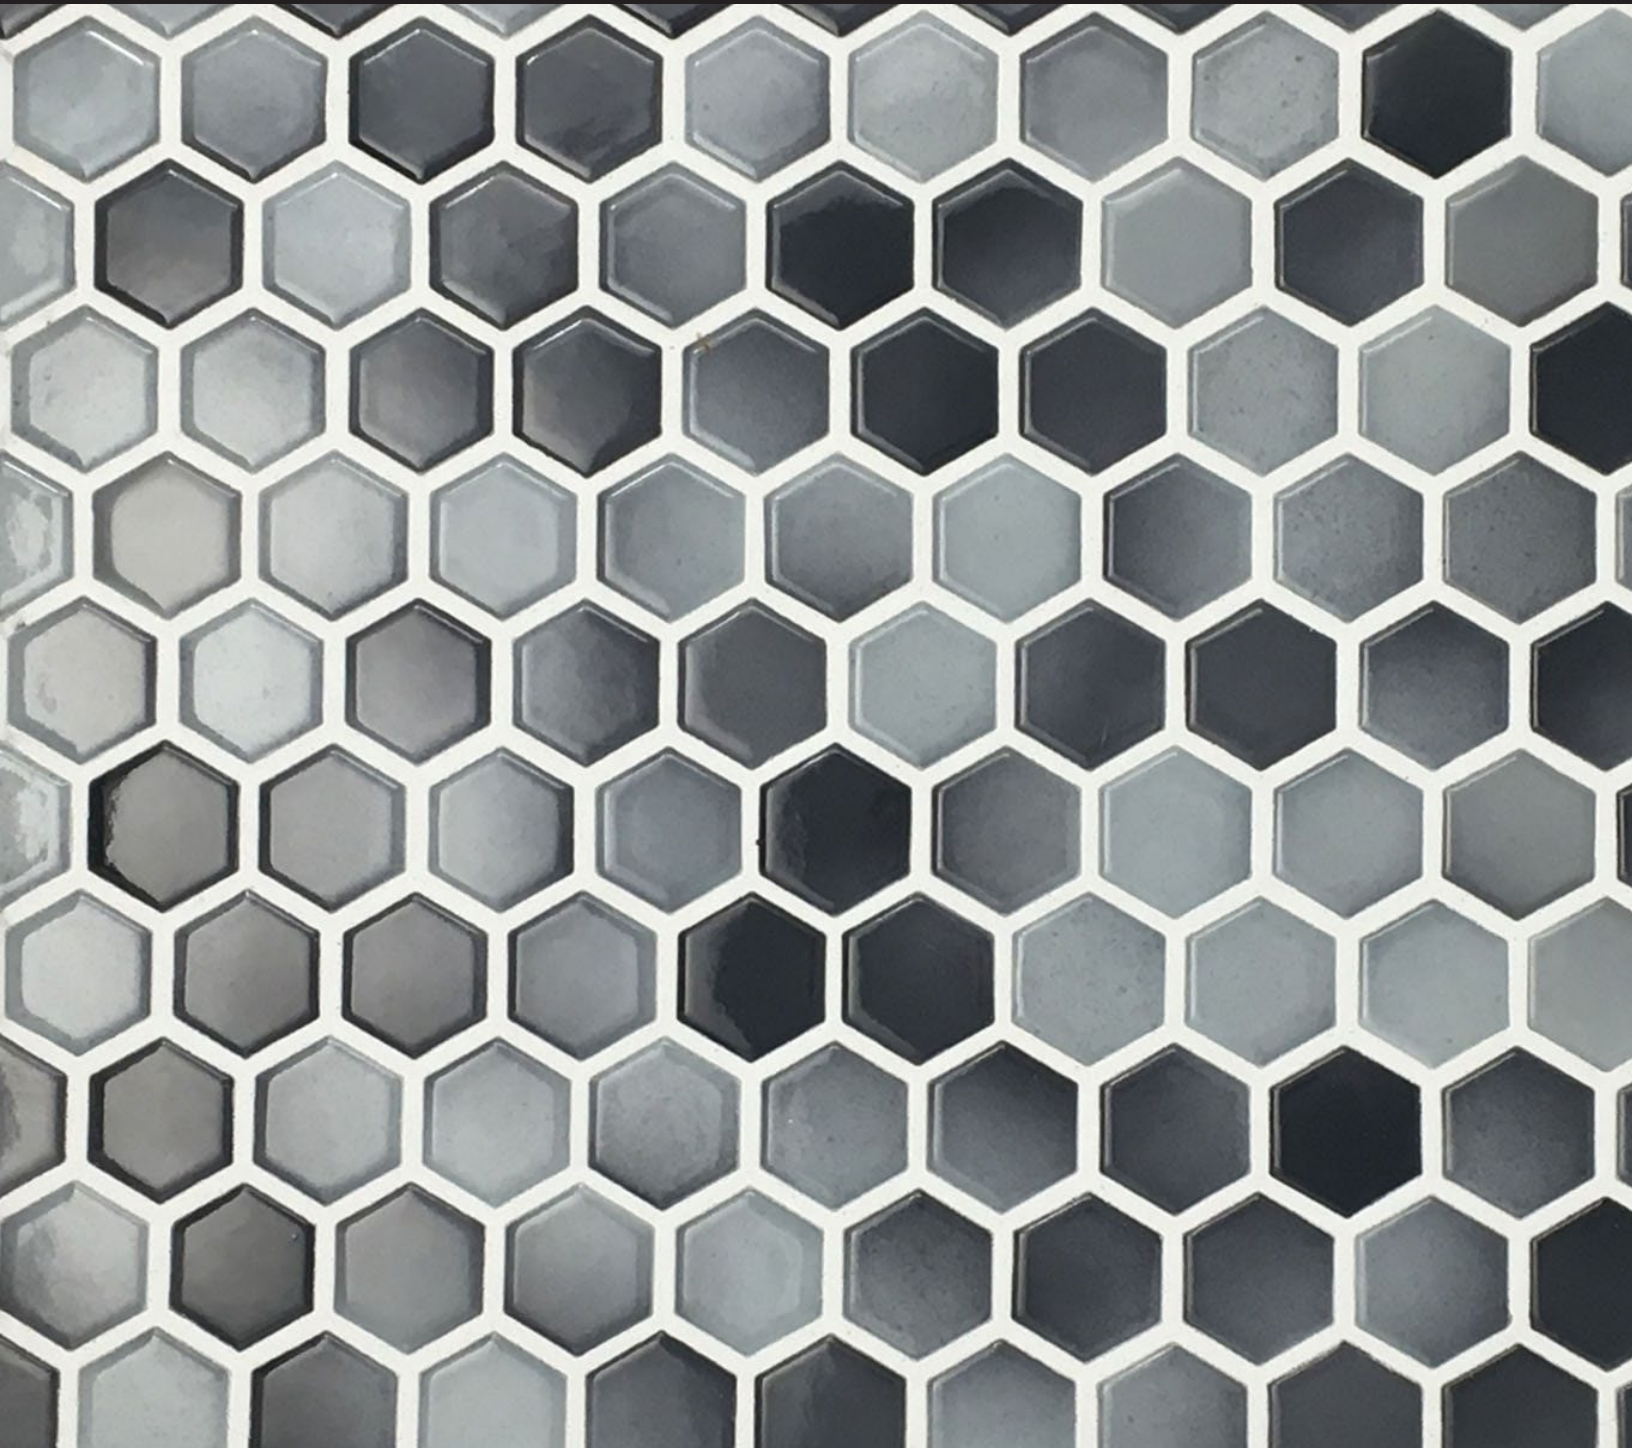

## Test Information

Item	Requirement - Test	ANSI. A137.1 Standard	FACTORY Test Result	Remark
	Method of Manufacture		Dry Pressed Tiles	
	Factory production control		ISO9001	Qualified
	Dimensional and Surface Quality:	3% or 0.8mm		
	Length	±0.8mm	±0.5mm	P
	Width	±0.8mm	±0.5mm	P
	Straightness of sides	±1.8mm	±0.5mm	P
	Rectangularity	±1.8mm	±0.5mm	P
	Smoothness	±0.8mm	±0.5mm	P
	Surface Quality			
	Visible defects of surface	min.95% defect free	no defect was found	P
	Water Absorption	≤0.5%	≤0.1%	P
	Breaking Strength	>250 LBF	>285 LBF	P
	Modulus of Rupture	≥35 Mpa	≥39 Mpa	P
	Wearing Strength	Less than 205mm <sup>3</sup>	Less than 140mm <sup>3</sup>	
	Abrasion Resistance		class IV	
	Thermal Linear Expansion	Less than 9*10 <sup>-6</sup> K <sup>-1</sup>	Less than 7*10 <sup>-6</sup> K <sup>-1</sup>	
	Thermal Shock		no defect found	p
	Crazing Resistance		no defect found	P
	Frost Resistance		no defect found	P
	Bond Strength	≥50 psi	133 psi	P
	Moisture Expansion			0.0003
	Lead & Cadmium (ASTMC895)		C<0.01; L<0.05 mg/L	
	Resistance to Staining		class A	P
	Resistance to Chemicals	Low Acids & Alkalis	class A	P
	Resistance to Chemicals	High Acids & Alkalis	class A	P



V1

Uniform Appearance



# GLAZED CERAMIC MOSAICS