



# EARTH

DELIGHT YOUR SENSES WITH THE EARTH COLLECTION'S UNIQUE COMBINATION OF SOPHISTICATED YET RUSTIC SEMI-MATTE CRACKLE GLAZE.



## MATTE CRACKLE



The hand-molded surface and the options of a smooth, textured or raised pattern surface add to its uniqueness and appeal. Beautiful 6"x6" dimensional inserts and the finishing touches from crown moldings to baseboards allow each installation to be detailed and tailored to fit the most impeccable taste. Design options abound and you will be thrilled with its aesthetic and functional contribution to bathrooms, showers, kitchens and more.

# EARTH Matte Crackle



Find out the product code simply by putting together the color and the item

Example: ADEW 836

## SEMI-MATTE FINISH



NAVAJO WHITE ADEW



FAWN ADEF



ASH GRAY ADEG



MORNING SKY ADEM

## FIELD TILES

### UNDULATED



836 3"x6"



831 3"x12"


### TEXTURED




836T 3"x6" Textured



831T 3"x12" Textured



101 3"x6" Waves



102 3"x12" Waves

## TRIMS

### FINISHING EDGES



FE



FE Corner


506 FE 0.5"x6"

512 FE 0.6"x12"


500 FE Corner 6"

501 FE Corner 12"


## DECORATIVE ACCESSORIES



502 6"x6" Energy Deco




503 6"x6" Cosmos Deco



206 1"x6" Bar Liner



207 1"x12" Bar Liner




204 1"x6" Quarter Round




205 Beak

## FINISHING TOUCHES



200 2.4"x6" Molding




201 2.4"x12" Molding




202




203



809 5.1"x6" Base Board (Glazed Top Edge)

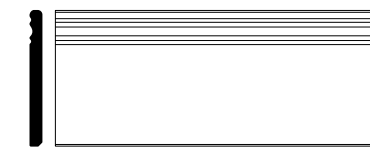

810 5.1"x12" Base Board (Glazed Top Edge)



899

### END CAPS

### FRAME CORNERS

## NAVAJO WHITE ADEW



ASH GRAY ADEG



Photo by: @redoakremodeling

FAWN ADEF



Photo by: Beechen & Dill Homes

MORNING SKY ADEM





FIELD TILES		
SIZE	SIZE SPECIFICATIONS	THICKNESS*
<b>UNDULATED TILE</b>		
3"x6"	2.953"x5.905" (75mm x 150mm)	0.366" (9.3mm)
3"x12"	2.953"x11.811" (75mm x 300mm)	0.366" (9.3mm)
<b>TEXTURED TILE</b>		
3"x6" Textured	2.953"x5.905" (75mm x 150mm)	0.366" (9.3mm)
3"x12" Textured	2.953"x11.811" (75mm x 300mm)	0.366" (9.3mm)
3"x6" Waves	2.953"x5.905" (75mm x 150mm)	0.366" (9.3mm)
3"x12" Waves	2.953"x11.811" (75mm x 300mm)	0.366" (9.3mm)
<b>DECORATIVE ACCESSORIES &amp; FINISHING TOUCHES</b>		
Bar Liner 1"x6"	0.984"x5.905" (25mm x 150mm)	0.669" (17mm)
Bar Liner 1"x12"	0.984"x11.771" (25mm x 299mm)	0.669" (17mm)
Quarter Round 1"x6"	0.905"x5.827" (23mm x 148mm)	0.394" (10mm)
Molding 2.4"x6"	2.401"x5.827" (61mm x 148mm)	1.102" (28mm)
Molding 2.4"x12"	2.401"x11.771" (61mm x 299mm)	1.102" (28mm)
Base Board (Glazed Top Edge) 5.1"x6"	5.157"x5.827" (131mm x 148mm)	0.512" (13mm)
Base Board (Glazed Top Edge) 5.1"x12"	5.118"x11.811" (130mm x 300mm)	0.512" (13mm)

\*Thickness is understood as the highest point of the tile.

APPLICATIONS		
	SUITABLE RESIDENTIAL	SUITABLE COMMERCIAL
Bathroom Walls**	YES	YES
Shower Walls**	YES	YES
Kitchen Walls**	YES	YES
Countertops	NO	NO
Fireplace Surrounds**	YES	YES
Outdoor Cooking / Bar Spaces (Non Freeze-Thaw Climates)**	YES	YES
Pool Waterlines / Water Fountains	NO	NO
Floors	NO	NO
	TEST METHOD ASTM / ISO	RESULT
Water Absorption	C-373 / 10545-3	Pass
Breaking Strength	C-648 / 10545-4	Pass
Stain Resistance***	C-1378 / 10545-14	Resistant
Chemical Resistance	C-650 / 10545-13	Non Resistant
Facial Dimensions	C-499 / 10545-2	Pass
Range of Thickness	C-499 / 10545-2	Pass
Warpage	C-485 / 10545-2	Pass

INSTALLATION	
GROUT JOINT RECOMMENDATION	SHADE VARIATION
3/8"	V1 - Uniform Appearance

CLEANING RECOMMENDATIONS
Routine with a non-abrasive/non-acidic, mild and PH neutral cleaner
SEALING GUIDELINES
Solvent based penetrating sealer suitable for ceramic tiles

CHARACTERISTICS	
Glaze	Crackle with subtle movement
Surface Sheen	Semi-Matte
Texture	Slightly Undulated

\*\*Crackle tiles must be properly sealed. (See SEALING instructions in INSTALLATION & MAINTENANCE guidelines).

\*\*\* In order to accomplish this test, the tile must be properly sealed.

Due to the nature of our tile, a certain amount of variation in color, shading, surface and texture are to be expected.



## **CONTACT US**

### **Corporate Headquarters South East Distribution Center**

9450 N.W.12th St.  
Miami, FL 33172  
Office: 305-513-4633  
Fax: 305-513-4634  
customerservice@adexusa.com

### **West Coast Distribution Center**

1745 N. St. Thomas Cir.  
Orange, CA 92865  
Office: 714-773-0197  
Fax: 714-773-9352  
customerservicewest@adexusa.com

### **North East Distribution Center**

1000 Wall St. W.  
Lyndhurst, NJ 07071  
Office: 201-355-8772  
Fax: 201-636-2802  
customerservicene@adexusa.com

**[www.adexusa.com](http://www.adexusa.com)**

